


# 3423A 2 Yard Batch Mixer

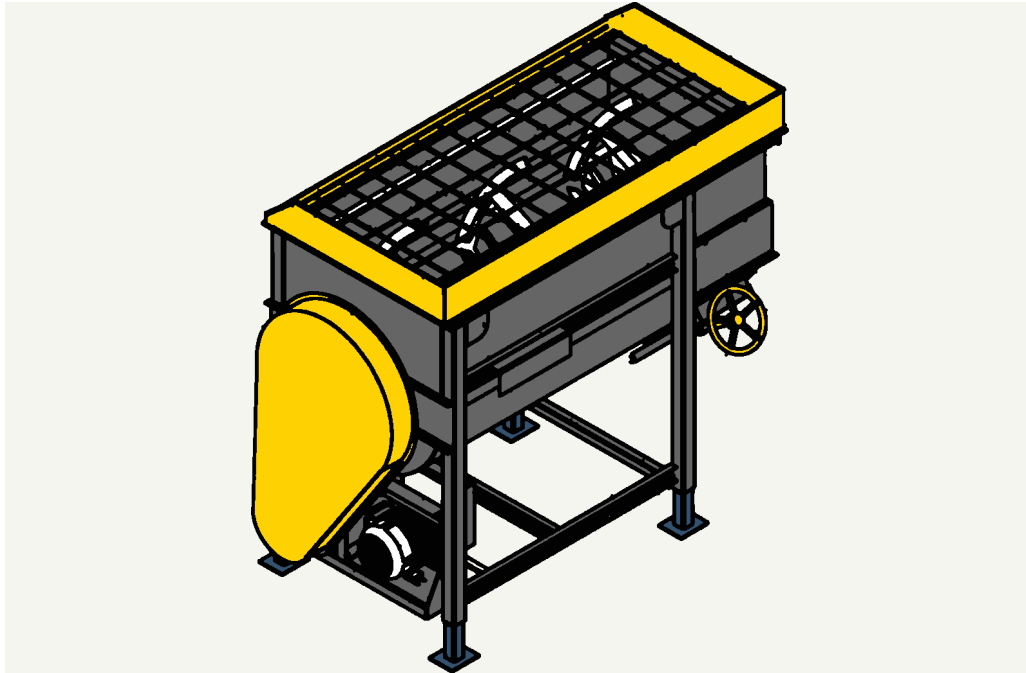

## PRODUCT NAME

**2 Yard Batch Mixer**

## MODEL NUMBER

**3423A**

## CATEGORY

**Media Mixing / Batch Mixers**

## PRODUCT OVERVIEW

The 2 Yard Mixer with BOLT REPLACEABLE BARREL, ADJUSTABLE PADDLES, and a 7.5 HP motor is built for higher-volume batch mixing with a 7 GA (3/16in) plate steel barrel. Options include AR400 abrasive-resistant plate, larger motors, three-phase power and variable speed.

## KEY FEATURES

- Paddle auger design that gently lifts and blends soil material
- Water spray pipes to moisten mix
- Standard safety grate with splash guard for employee protection
- Heavy duty construction for years of service

## APPLICATION

STILT.PRO Mixing Equipment offers rapid, complete and uniform mixing of your soil media. Our mixer capacities range from a small ¼ yard mixer to our large 4-yard mixer. Each utilizes a custom paddle auger design, which gently lifts and blends your media.


1 Year Limited Warranty  
Service / Parts through STILT.PRO  
[www.stilt.pro](http://www.stilt.pro)

# 3423A 2 Yard Batch Mixer

## QUICK GUIDE

Mixers operate by loading your ingredients into the machine through the top grate. Turn on and let the batch mix for a few minutes. Then open the outlet or slide gate to allow material to be released.

- Determine capacity by how often you want to mix product.
- Overmixing can damage product, so make sure you can clear the mixer when batch is complete.
- Add water to reduce dust and prepare the media for plants.
- Conveyors can be used to lift material into other equipment.

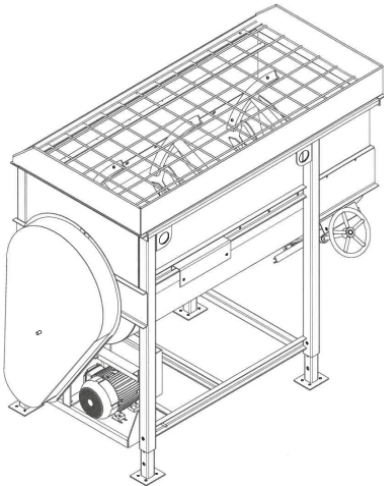

## TECHNICAL DATA SPECIFICATION

### PERFORMANCE

|                 |                |
|-----------------|----------------|
| Hopper Capacity | 2 cu yd        |
| Motor Size      | 7.5 HP         |
| Production Rate | 12–16 cu yd/hr |
| Tank Thickness  | 7 ga (0.1875") |

### POWER REQUIREMENTS

|                             |                                 |
|-----------------------------|---------------------------------|
| Phase / Voltage / Frequency | Single Phase / 208-240V / 60 Hz |
| Amperage                    | 30–32A                          |

### AVAILABLE ATTACHMENTS, ACCESSORIES AND OPTIONS

|                         |                                                                                          |
|-------------------------|------------------------------------------------------------------------------------------|
| Tank Options            | 3/16" AR400 abrasive-resistant plate                                                     |
| Motor Size and Power    | 10 HP motor, 15 HP motor, 3-phase, 208-240V / 480V                                       |
| Portability             | Pneumatic tires, Casters                                                                 |
| Operator Customizations | Foot pedal control, Chute / bag filler outlet, Variable speed drive, Assisted lift cover |

### SIZE AND WEIGHT

|            |                                 |
|------------|---------------------------------|
| Dimensions | 94"L x 73"W x Adjustable height |
| Weight     | 2200 lb                         |

Please reach out to us to learn more about options and to help you decide which piece of equipment is right for your application. Additional options may be available.

A03844 · generated from data

## CONTACT US TO PLACE AN ORDER TODAY!

AFFORDABLE & EASY-TO-USE EQUIPMENT | 261 Quality Drive, Thomson, GA 30824 | (706) 208-4807 | sales@stilt.pro | www.stilt.pro